




POINTSHIELD™
Portable Diver Detection Sonar

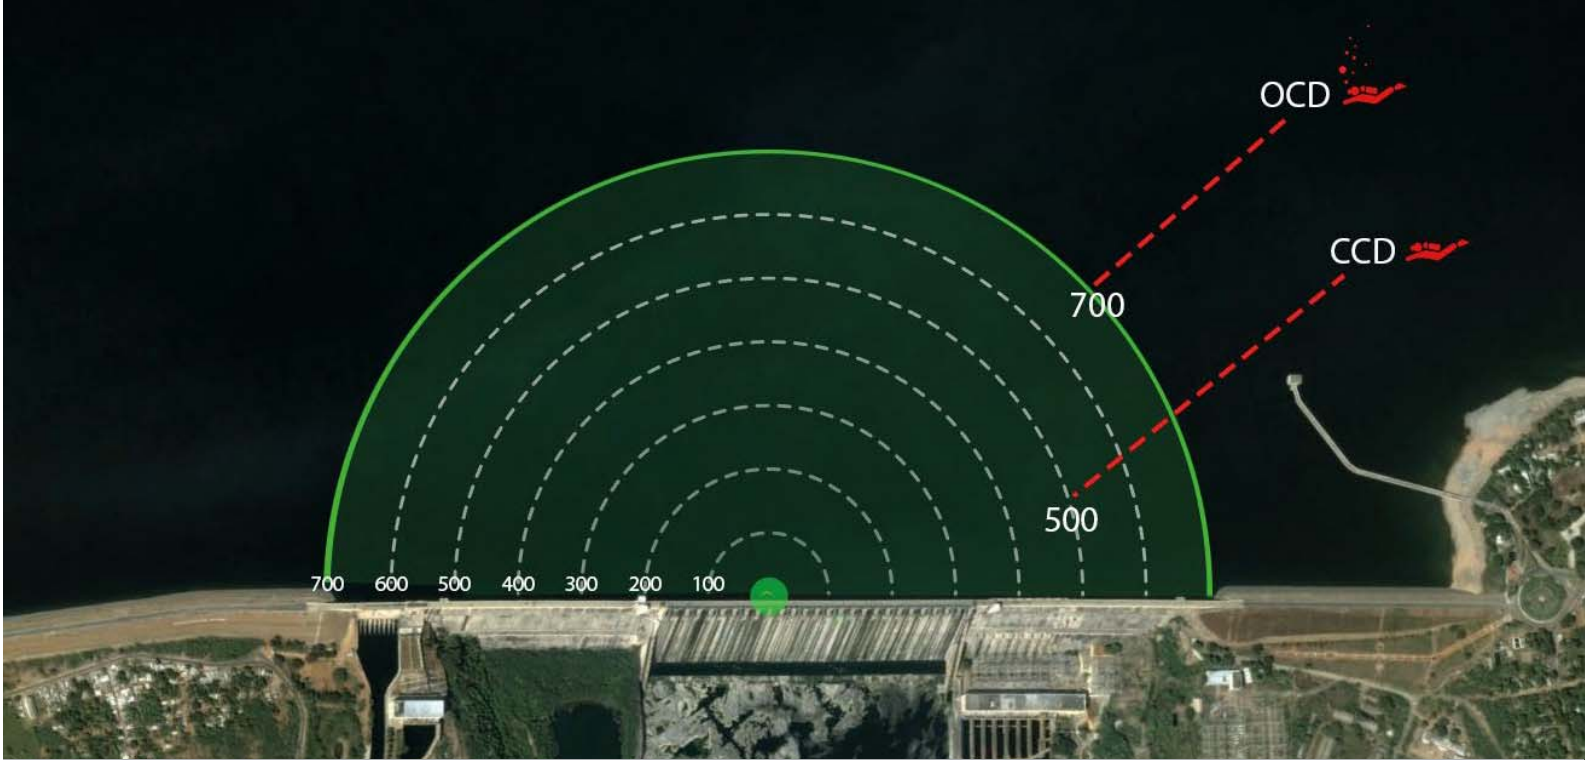

The Underwater Zone Security System

Underwater site security often involves a demand to protect specific and well defined zones, such as a section of a narrow river, a water intake channel, an anchored ship or a constricted area. In response to this need, DSIT has added a second Shield™ to its underwater site security line - a highly accurate diver detection sonar system to cover short to medium ranges – the PointShield™ Underwater Zone Security system.

The Shield™ Product Line Overview

Superior performance is the key to the success of the C4i Shield™ line. Starting with the AquaShield™ Diver Detection Sonar (DDS) system that has been chosen for the protection of numerous coastal sites around the world and continuing with the new PointShield™ DDS, our underwater security systems are designed to protect effectively.

Like its bigger brother the AquaShield™ DDS, the PointShield™ boasts a unique modular design that enables tailoring of the system to customer requirements and site specific geography. This new tough but light DDS offers detection for even the weakest of targets, and can easily handle hundreds of targets simultaneously. C4i has taken pains to ensure the same winning features in the PointShield™ that have made the AquaShield™ name synonymous with underwater site security - fully automatic mode of operation, very low maintenance requirements and high system reliability.

The Threat

Any underwater intruder, including:

- >> Divers with closed circuit breathing apparatus
- >> Divers with open circuit breathing apparatus
- >> Unmanned Underwater Vehicles (UUVs)





The PointShield™ Edge

| | |
|--|---|
| <p>Light and Portable</p> <ul style="list-style-type: none"> ▪ Underwater unit is small and light weight ▪ Rapidly deployable and easily moved between sites ▪ Ideal for: <ul style="list-style-type: none"> ▪ Permanent installation ▪ Ship protection ▪ Rapid deployment ▪ Simple installation: multiple methods (seabed, pier, tripod, mooring pile, etc.) | <p>Fully Automatic – No Operator Required!</p> <p>The system is fully automatic and does not require a full time operator.</p> <p>System features include:</p> <ul style="list-style-type: none"> ▪ Automatic detection ▪ Automatic tracking ▪ Automatic classification ▪ Automatic alert |
| <p>Top of the Line Detection Capabilities</p> <ul style="list-style-type: none"> ▪ Accurate detection at ranges up to 1,000 meters ▪ Tailored to detect threats of any size and Target Strength ▪ Can handle more than 1,000 contacts simultaneously ▪ Enables the investigation of targets using a special zoom display | <p>Low Cost of Ownership</p> <ul style="list-style-type: none"> ▪ Very little maintenance required ▪ Easy to clean underwater or, alternatively, easy to remove from the water for cleaning ▪ System includes a Built-in-Test (BIT) function that monitors and issues an alert if failure is detected |
| <p>User Friendly Displays</p> <ul style="list-style-type: none"> ▪ Windows-based software with intuitive displays and menus ▪ Includes: multiple display formats, target data, exclusion zones and more | <p>Modular and Flexible Architecture</p> <ul style="list-style-type: none"> ▪ Sensors can cover any required sector from 0° to 360° ▪ Multiple units can work simultaneously and report to the same Command & Display unit |
| <p>Enables Pinpoint Response</p> <ul style="list-style-type: none"> ▪ Highly accurate positioning of threat ▪ Rapid update rate of tactical picture | <p>Ease of Integration</p> <ul style="list-style-type: none"> ▪ Open Software Architecture supports easy integration with any sensor ▪ Can be incorporated into any C&C system |
| <p>Robust System for Long Term Operation</p> <ul style="list-style-type: none"> ▪ Built to operate 24/7/365 in all weather and water conditions | |

PointShield™ Specifications

| PointShield™ Installation | Special Processing Algorithms | Nominal Detection Ranges | | | | | | | |
|---|--|---|--------------------------|--------|-----------------|--------|---------------------------------|-----------|--------|
| <ul style="list-style-type: none"> Portable Pier Installation Mooring Pile Installation Tripod Installation Anchored Installation | <ul style="list-style-type: none"> Performance Optimization Bearing Interpolation Adaptive TVG Two Dimensional Normalization Adaptive Threshold Automatic Detection Automatic Tracking Automatic Classification False Alarm reduction Automatic Alert Automatic Elimination of Wakes Static Target Suppression | Diver with closed circuit breathing apparatus | 500m | | | | | | |
| The PointShield™ Main Units | | Diver with open circuit breathing apparatus | 700m | | | | | | |
| <ul style="list-style-type: none"> Underwater Unit Processing and Display Unit Junction Box | | Transmit / Receive Parameters | | | | | | | |
| The Underwater Unit | | Source Level | 210 dB re 1µPa @ 1 meter | | | | | | |
| Weight and dimensions of Underwater unit: <table border="0" style="margin-left: 20px;"> <tr> <td>▪ Diameter</td> <td>450 mm</td> </tr> <tr> <td>▪ Height</td> <td>710 mm</td> </tr> <tr> <td>▪ Weight in air</td> <td><45 Kg</td> </tr> </table> | ▪ Diameter | 450 mm | ▪ Height | 710 mm | ▪ Weight in air | <45 Kg | Recording & Playback | Frequency | 70 KHz |
| | ▪ Diameter | 450 mm | | | | | | | |
| ▪ Height | 710 mm | | | | | | | | |
| ▪ Weight in air | <45 Kg | | | | | | | | |
| | Several modes of data recording and playback enable debriefing of special events | Bandwidth | 20 KHz | | | | | | |
| | | Sector coverage | 360° | | | | | | |
| Display Formats | Built In Test (BIT) | Range Accuracy | 0.3 m | | | | | | |
| <ul style="list-style-type: none"> Sonar Data Tactical Pictures on aerial photo, satellite Image or nautical chart Overlay of sonar data on any type of tactical picture | <ul style="list-style-type: none"> Constant monitoring of all modules Automatic alert in case of failure | Bearing Accuracy | 0.4° | | | | | | |
| | | Range scale | Operator selectable | | | | | | |



LEARN MORE: c4icommunication.com

FOR MORE INFORMATION: contact@c4icommunication.com or +1 (302)981.1340