C4i RILA AMBULANCE STANAG 4569 LEVEL 3

contact@C4icommunication.com / www.C4icommunication.com

C4i communication

Base Vehicle Specifications	
Engine	5.88 Liter Power Stroke Inline 06 Cylinders, Turbo Diesel
Horsepower (HP/RPM)	280 hp @ 2500 rpm
Torque (Nm/RPM)	930 Nm @ 1,250 RPM
Length x Width x Height (mm)	6650 x 2650 x 3050
Kerb weight	11300 Kg
Seating	Driver, Co-Driver, 3 Medical Personnel

Armoring Specifications

- Opaque and transparent armor up to STANAG 4569 Level 3
- V-Hull shaped floor for blast protection up to STANAG 4569 Level 4a & 4b
- High payload tires & wheels equipped with run-flat inserts & optional semi central automatic tire inflation system (SCTIS)
- Military grade 24V electrical system
- Heavy duty brake system, suspension system and wheel and tire package
- Fully customized rear compartment with medical equipment, storage units, oxygen tanks, stretchers & much more
- Basic and advanced ambulance packages available

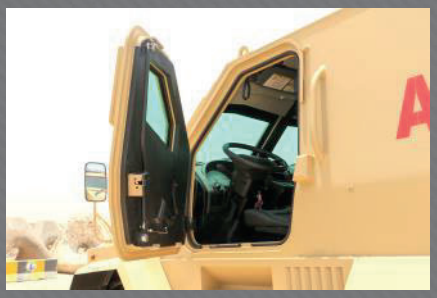

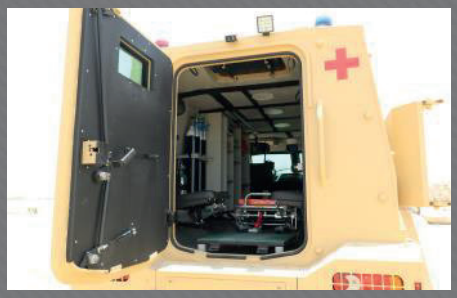

Bureau des États-Unis
2915 Ogletown road #1072
Newark, DE 19713 U.S.A
Tél: +1 (302) 981 1340
Fax: +1 (302) 380 3694

Bureau Maroc
219 Boulevard Zerktouni
BP 5277 – BAM Maârif
20330 Casablanca –Maroc
Tél: +212 (0)5 22 99 16 93
Fax: +212 (0)5 22 98 38 27

contact@c4icommunication.com / www.c4icommunication.com